

Soilmec SM11

Track Mounted Rotary Drilling Rig

DIMENSIONS

	Travelling	Working
Length:	7450mm	6000mm
Width:	2000mm	2000mm
Height:	3150mm	7450mm
Weight:	11500kg	

CAPABILITY

Pull down – 9600 daN
Pull back – 9600 daN

- 88.9mm Hutte to 300m
- 101mm Hutte to 170m
- 133mm Hutte to 130m
- 114mm Symmetrix to 150m

Double Clamp range of up to 320mm diameter

DRILL HEAD


2 Speed Krupp HP35A Percussive
Torque / Speed range:

	Gear 1	Gear 2
Torque	870 daN	40 daN
Speed	33 rpm	313 rpm

Impact rate: 30 blows per second

COMPANY HOLDING

1No.

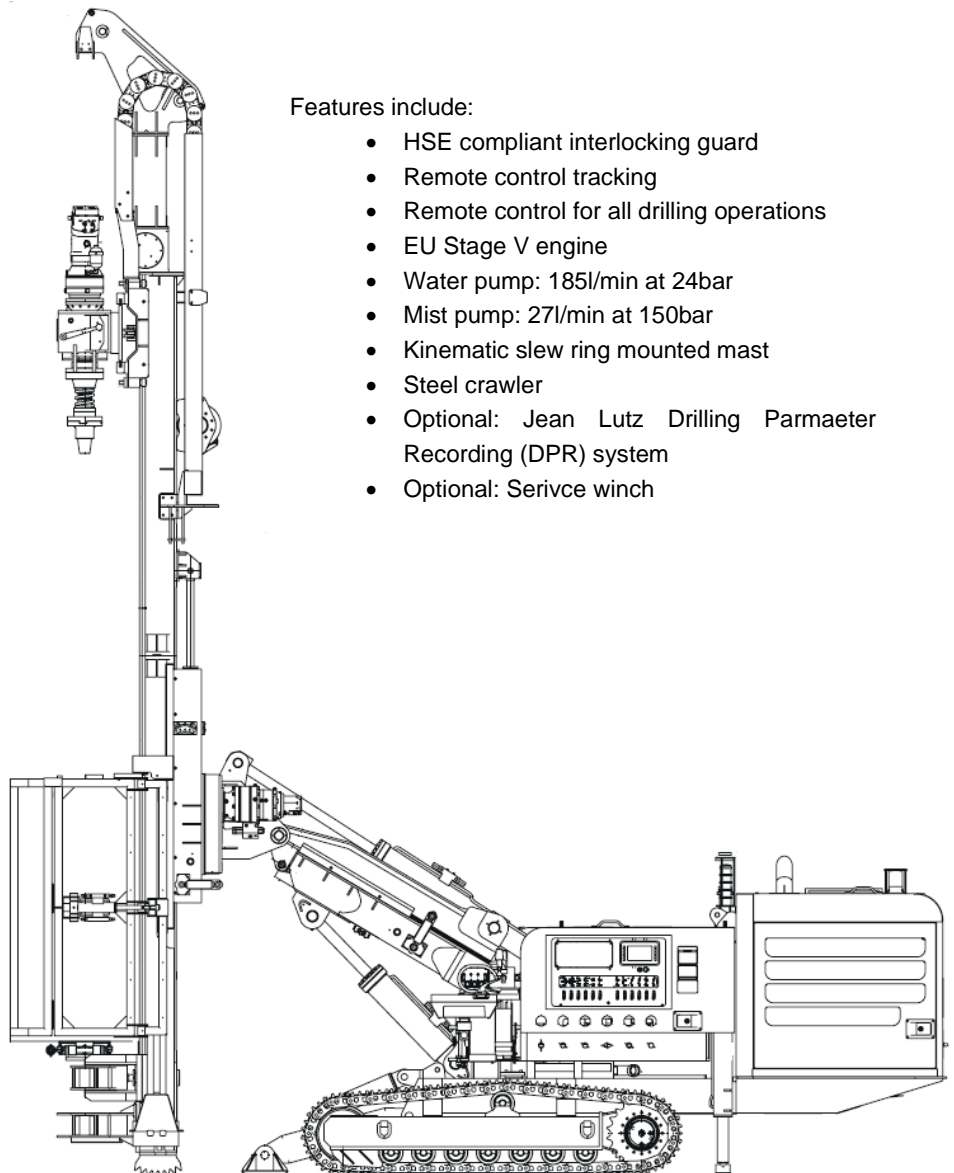

Features include:

- HSE compliant interlocking guard
- Remote control tracking
- Remote control for all drilling operations
- EU Stage V engine
- Water pump: 185l/min at 24bar
- Mist pump: 27l/min at 150bar
- Kinematic slew ring mounted mast
- Steel crawler
- Optional: Jean Lutz Drilling Parameter Recording (DPR) system
- Optional: Service winch